

ADVANCED FINITE ELEMENT ANALYSIS

Prof. Brighenti, Prof. F. Vernerey – written test, date: 06/07/2017

1. Exercise

Illustrate the Newton-Rapson algorithm for the solution of a nonlinear problem modelled by using finite elements. Assume only the mechanical nonlinearity (i.e. small strains and displacements). Give a short description of the modified NR algorithm.

2. Exercise

The large deformation of a body is described by uniform extension corresponding to the stretches $\lambda_1 = 1.5, \lambda_2 = 0.3, \lambda_3 = 0.3$. Determine the deformation gradient tensor \mathbf{F} , the Green-Lagrange strain tensor \mathbf{E} , the engineering strain $\boldsymbol{\varepsilon}$ and the change in volume of the material. Suppose that the material is of the St.Venant-Kirchhoff type (i.e. $\mathbf{S} = \mathbf{C} \cdot \mathbf{E} = \lambda \cdot \text{tr} \mathbf{E} \mathbf{I} + 2\mu \mathbf{E}$). Determine the 2nd Piola-Kirchhoff stress tensor \mathbf{S} (referred to the undeformed configuration) and the true Cauchy stress $\boldsymbol{\sigma}$ (referred to the deformed configuration) by adopting the following elastic constants $\lambda = 1.5 \text{MPa}, \mu = 0.9 \text{MPa}$.


3. Exercise

A bar element, restrained as shown in the figure, is loaded by the axial force P (fig. a). The element has an initial length of 1.0 m and is made of an elastic-plastic material whose stress-strain law is represented by a bilinear curve (see fig. b) with kinematic hardening.

The structure is modelled by a single truss finite element characterized by the dof u . The cross section area of the bar is $A = 10 \text{ cm}^2$, while the load history applied to the element is as follows:
 $P(t_0) = P_0 = 0, P(t_1) = P_1 = 400 \text{ kN}, P(t_2) = P_2 = -400 \text{ kN},$
 $P(t_3) = P_3 = +200 \text{ kN}.$

Determine the plastic modulus H and the history of the resulting tip displacement $u(t)$ of the bar by evaluating first the stress-strain history. Use the return mapping algorithm to make the stress-strain point to lie always on the $\sigma - \varepsilon$ curve of the material.

$E = 200 \text{GPa}, E_T = 60 \text{GPa}, \sigma_y^0 = 320 \text{MPa}$

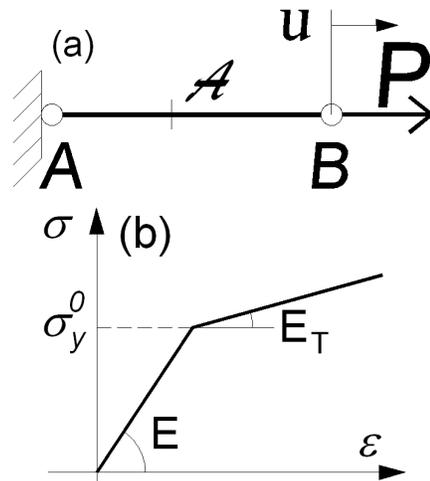

4. Exercise

Discuss the three main modes of deformation of a shell by answering the following questions:

- Provide their general expression in terms of basis vectors and their derivatives.
- Use a schematic to explain the physical meaning of each one of them.
- Based on rigorous mathematical arguments, explain why, in general, bending and stretch are coupled
- Explain the typical simplification made for thin shells.